

NEW

FORESTRY MULCHERS FOR EXCAVATORS

# BLO/EX

## Forestry mulcher with Bite Limiter technology for excavators up to 5 tons.

The BLO/EX forestry mulcher for 2-5 ton excavators can shred material up to 8 cm in diameter. Bite Limiter technology is ideal for high productivity vegetation management, designed with reliable and efficient shredding and easy maintenance in mind.

The BLO/EX's Direct Drive motor minimizes maintenance and makes it possible to have an extremely compact machine body. The BLO/EX can be equipped with BL/MINI blades and C/3/MINI teeth.

 30-90 L/min


 Ø 8 cm max

 2-5 t



Hydraulic block with flow control valve in the motor

Fixed thumb bracket built into the frame useful for moving materials that need to be mulched

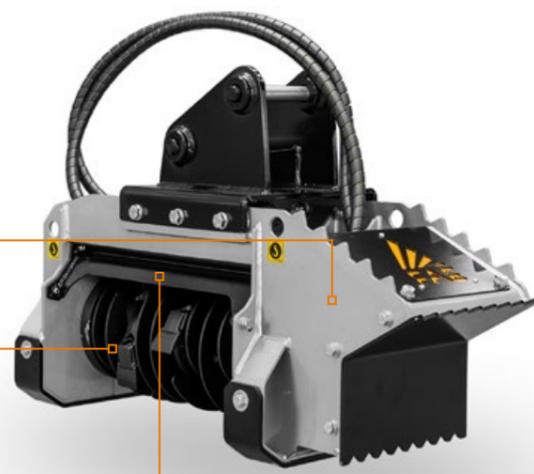

**Direct Drive Motor**  
for less maintenance and reduced size

**Rotor Bite Limiter**  
special steel profiles limit the blades' reach and optimize productivity

**Adjustable rear deflector**  
controls mulched material output for greater safety

### MAIN ACCESSORIES



**Customized attachment bracket kit with customized pins**



**Attachment plate with self-leveling device (optional)** adapts to all types of terrain

### STANDARD EQUIPMENT

11 cc-gear hydraulic motor (BLO/EX-50)	Deflector
16 cc-gear hydraulic motor (BLO/EX-75)	Thumb bracket
25 cc-gear hydraulic motor (BLO/EX-100)	Flow Control system valve with integrated safety and anticavitation valves
Enclosed, dust-resistant machine body	Interchangeable forged steel rotor shafts
Motor enclosed in the frame	Bite Limiter Rotor
Hydraulic hoses	Wear-resistant interchangeable Hardox® soles
Direct-drive transmission	

### OPTIONS

Customized attachment bracket kit with customized pins	11 cc-gear hydraulic motor (BLO/EX-75)
Attachment plate with self-leveling device	Multiple tooth options
16 cc-gear hydraulic motor (BLO/EX-50 and BLO/EX-100)	

MODEL	BLO/EX-50	BLO/EX-75	BLO/EX-100
<b>Flow rate (L/min)</b>	30-70	30-70	70-90
<b>Pressure (bar)</b>	180-250	180-250	180-250
<b>Excavator weight (t)</b>	2-4	3-4	4-5
<b>Working width (mm)</b>	560	800	1000
<b>Total width (mm)</b>	1012	1252	1472
<b>Weight (kg)</b>	213	251	330
<b>Rotor diameter (mm)</b>	310	310	310
<b>Max shredding diameter (mm)</b>	80	80	80
<b>No. blades</b> type BL/MINI	10	14	20
<b>No. tooth</b> type C/3/MINI	10	14	20

The technical data in this catalogue may be altered without prior notice.



**BLADE BL/MINI**  
(standard)



**TOOTH C/3/MINI**  
(optional)